



# XT3514K

TELEHANDLERS



# XT3514K

TELEHANDLERS

## Specifications



| ITEM                                   | XT3514K         |
|----------------------------------------|-----------------|
| <b>Measurements</b>                    |                 |
| Overall length (without fork)          | 6074mm          |
| Overall width                          | 2350mm          |
| Overall height                         | 2450mm          |
| Fork length                            | 1200mm          |
| Fork width                             | 122mm           |
| Fork height                            | 50mm            |
| Boom length                            | /               |
| Wheelbase                              | 3490mm          |
| Ground clearance                       | 400mm           |
| Turning radius(inside/outside)         | 3922mm/4100mm   |
| <b>Productivity</b>                    |                 |
| Max. lift capacity                     | 3500kg          |
| Max.lifting height                     | 13.4m           |
| Max.outreach                           | 9.3m            |
| Max.travel speed                       | 32km/h          |
| Max.height lifting capacity            | 2000kg          |
| Max.amplitude lifting capacity         | 500kg           |
| Unladen lifting/owering speed          | 13s/9s          |
| Unladen Extension/retraction speed     | 17s/14s         |
| Gradeability(overload)                 | 35%             |
| <b>Technical Data</b>                  |                 |
| Tilting angle of fork(tip up/tip down) | -14°/112°       |
| Hydraulic system pressure              | 280bar          |
| Hydraulic oil tank volume              | 135L            |
| Fuel tank volume                       | 130L            |
| Hollow tire                            | 400/80-R24      |
| <b>Power source</b>                    |                 |
| Make/model                             | Cummins QSF3.8  |
| Rated power                            | 74kW/2200rpm    |
| Max torque                             | 375N·m/1600 rpm |
| <b>Transmission</b>                    |                 |
| Make/model                             | /               |
| No. of gear                            | /               |

|                                       |         |
|---------------------------------------|---------|
| <b>Weight</b>                         |         |
| Total vehicle cube weight(with forks) | 10500kg |

### The available attachments include but notlimited to the following

|                |
|----------------|
| Hook           |
| Forks          |
| Winch          |
| Bucket         |
| Basket         |
| Log clamp      |
| Workplatform   |
| Cylinder clamp |

Range of motion GTH-XT3514K with stabilizers up

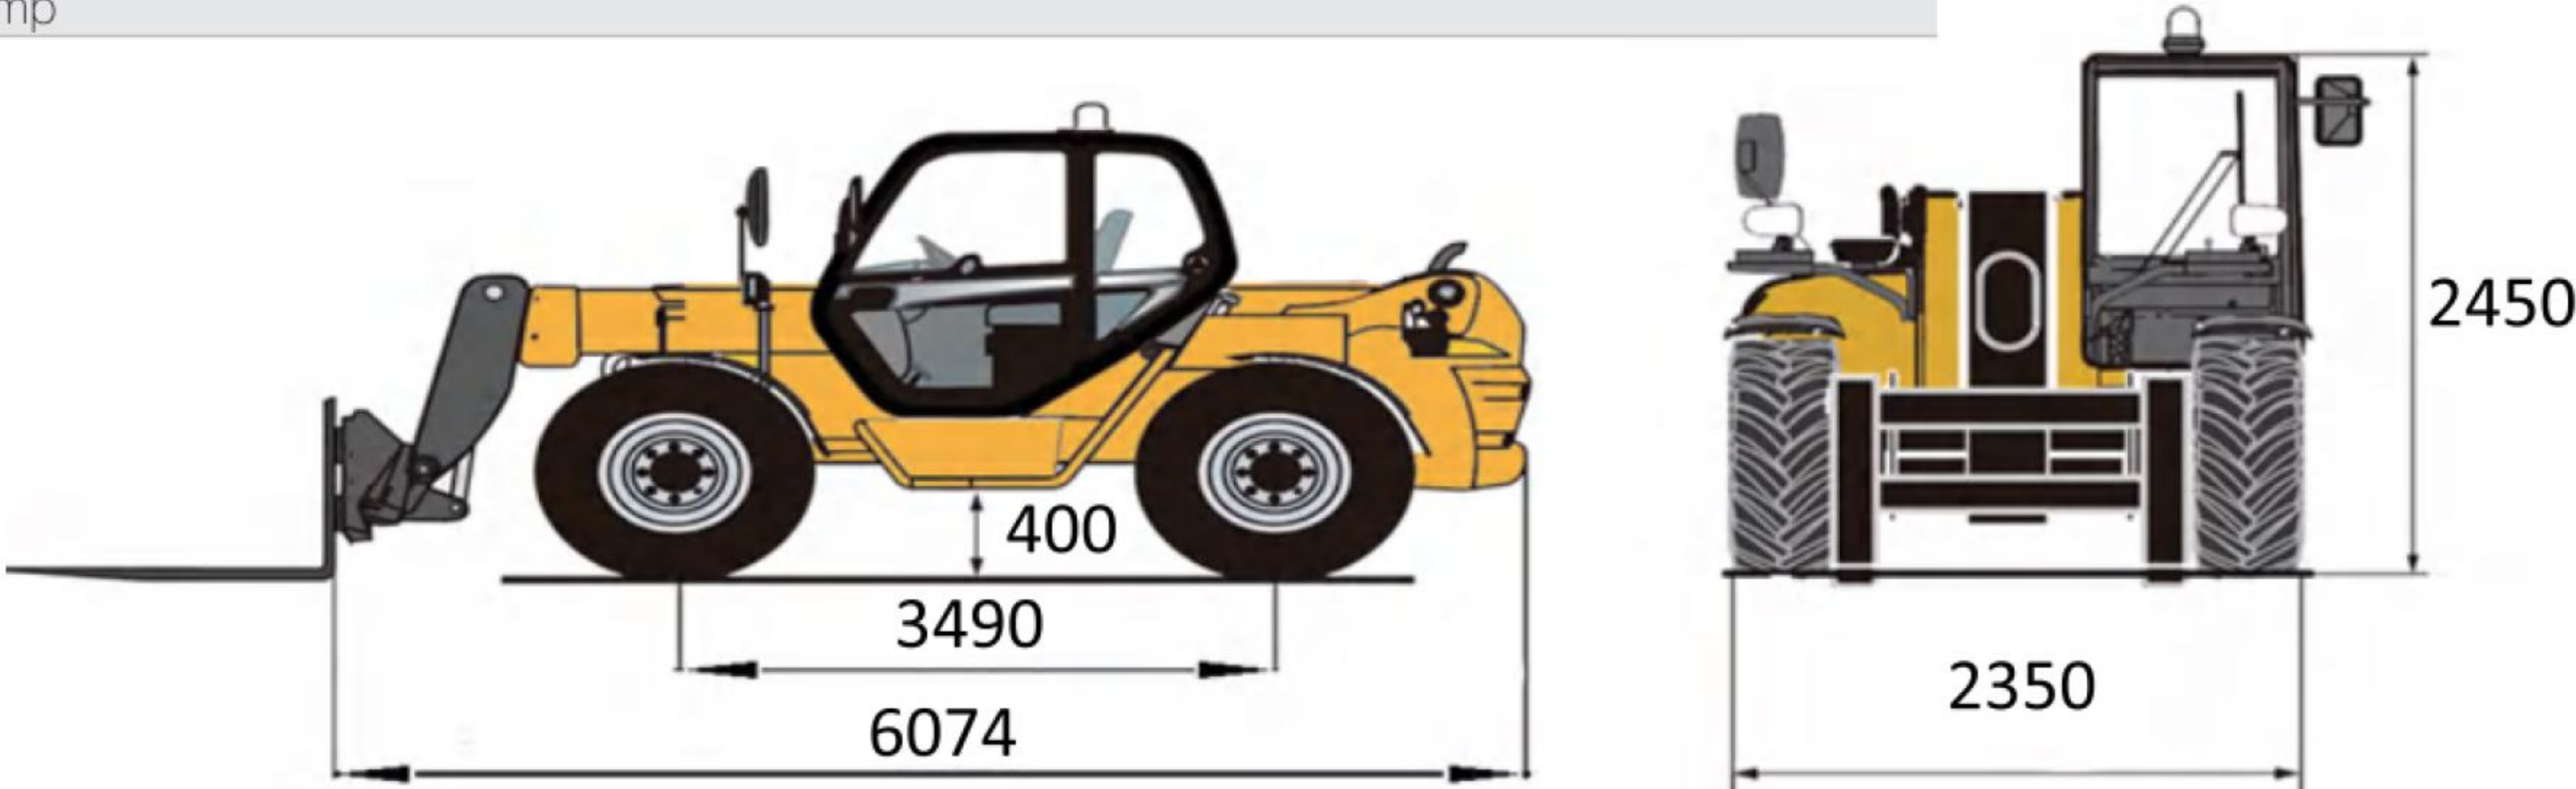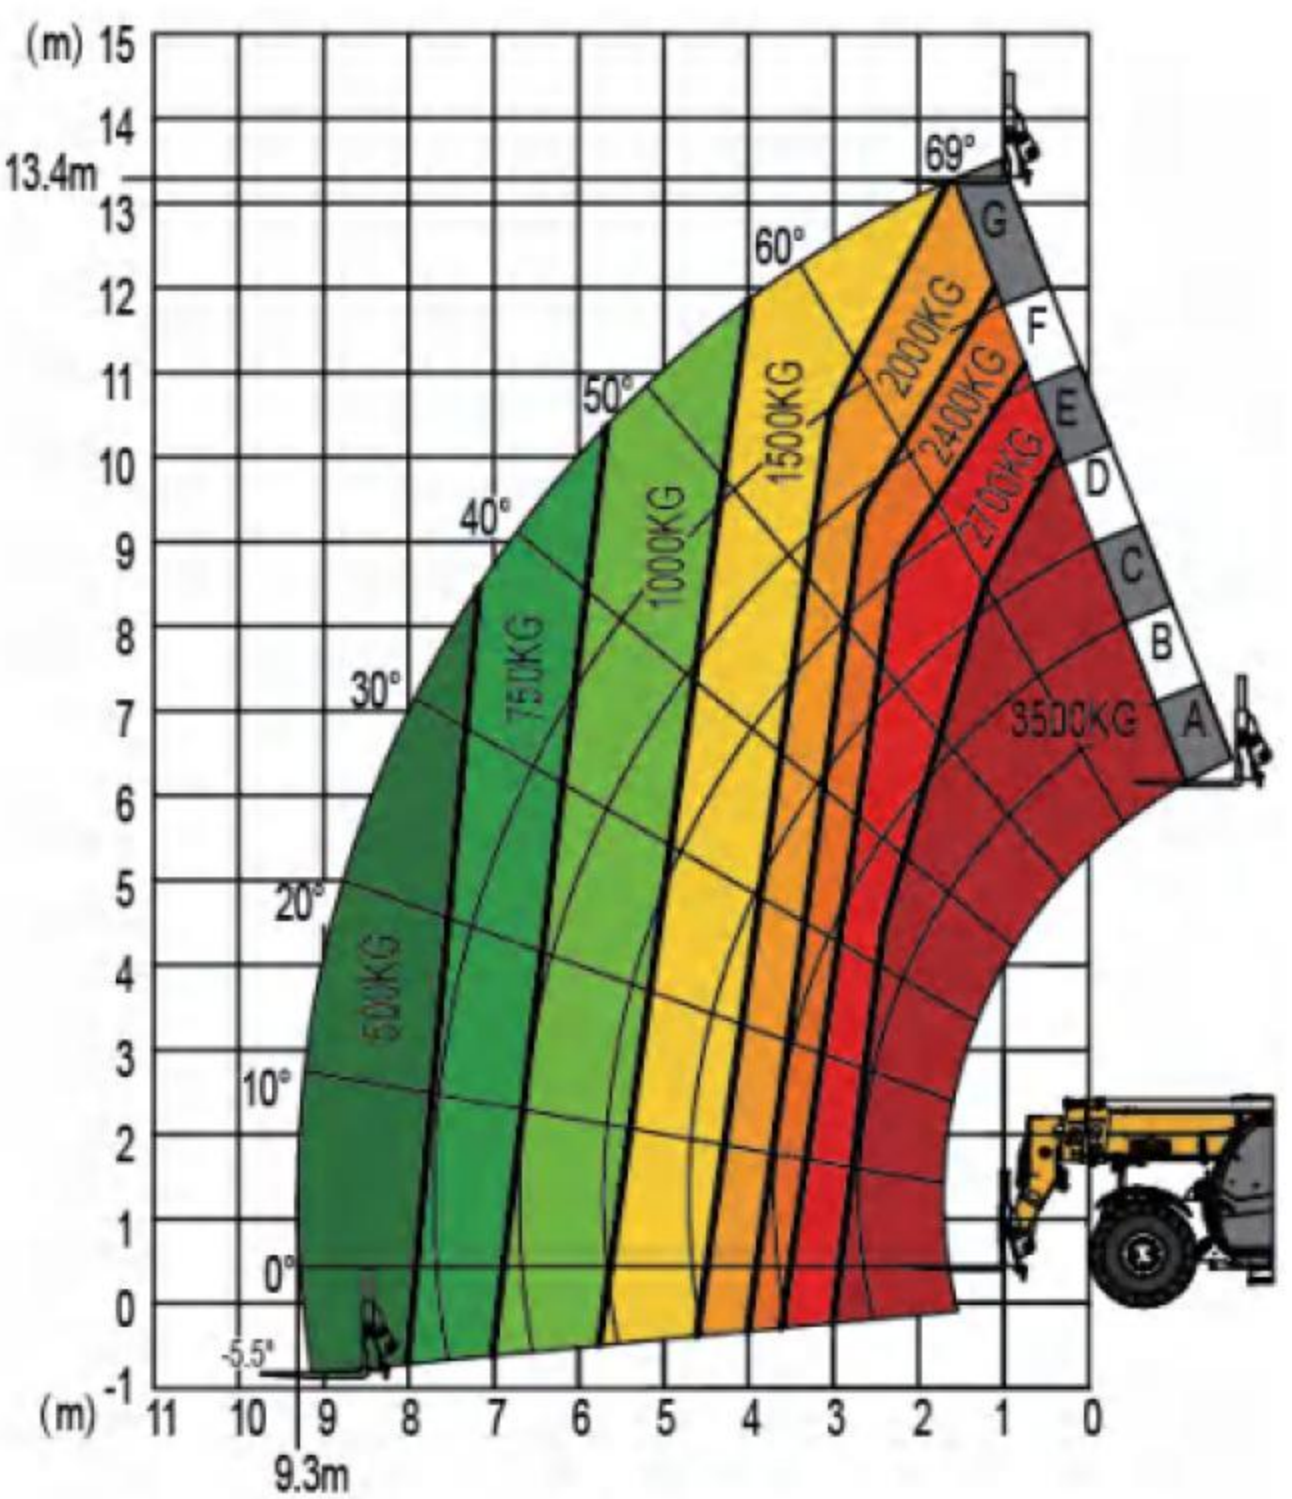

SOLID TO SUCCEED

The print does not belong to the contract, nor a part of the vehicle purchase contract. We reserve the right to revise the product model, paramenters, configuration based on the continuous improvement requirements of the product, without prior notice. Pictures are for reference only, and the specific product shall depend on the real product.